



# CATALOGUE 2023

[www.digitexpower.com](http://www.digitexpower.com)

## DGT-BP98S



Compact V-lock battery  
No memory effect  
Power 98 Wh - 6.6 Ah  
Voltage 14.8 V  
2 D-Tap outputs  
2 USB outputs 5 V - 2.1A  
5 levels LED for charge indication  
Uses LG 18650 cells  
Weight 800 g  
Size 98 x 125 x 56 mm



## DGT-BP115S



- Compact V-lock battery
- No memory effect
- Power 115 Wh - 7.8 Ah
- Voltage 14.8 V
- 2 D-Tap outputs
- 2 USB outputs 5 V - 2.1A
- 5 levels LED for charge indication
- Uses LG 18650 cells
- Weight 800 g
- Size 98 x 125 x 56 mm



## DGT-BP149S



Compact V-lock battery  
No memory effect  
Power 149 Wh - 10.05 Ah  
Voltage 14.8 V  
2 D-Tap outputs  
2 USB outputs 5 V - 2.1A  
5 levels LED for charge indication  
Uses LG 18650 cells  
Weight 800 g  
Size 98 x 125 x 56 mm





## DGT-BP200S



- Compact V-lock battery
- No memory effect
- Power 198 Wh - 10.05 Ah
- Voltage 14.8 V
- 2 D-Tap outputs
- 2 USB outputs 5 V - 2.1A
- 5 levels LED for charge indication
- Uses LG 18650 cells
- Weight 1000 g
- Size 98 x 125 x 75 mm



## DGT-U30




Compatible with Sony BP-U30  
Built-in microprocessor that communicates with Sony latest cameras allowing the operator to see the status on the camera's viewfinder

Charging status indicator  
High capacity allows to power a camcorder up to 6 hours  
Power 34.6 Wh - 2.4 Ah Voltage 14.4V  
Weight 205 g Size 43 x 40 x 70 mm




## DGT-U65

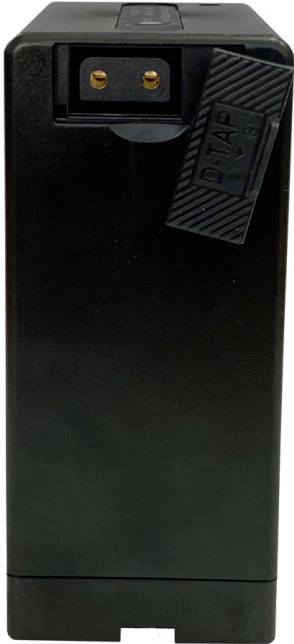

Compatible with Sony BP-U60 and BP-U70  
Built-in microprocessor that communicates with Sony latest cameras allowing the operator to see the status on the camera's viewfinder

Charging status indicator  
High capacity allows to power a camcorder up to 6 hours  
Power 74.9 Wh - 5.2 Ah  
Voltage 14.4 V  
1 D-Tap outputs  
1 USB output  
Weight 445 g  
Size 41 x 70 x 98 mm

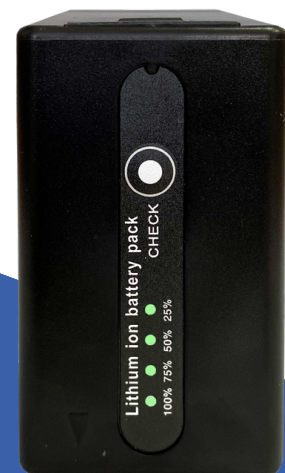



## DGT-U100

Compatible with Sony BPU-100.

Built-in microprocessor that communicates with Sony cameras allowing the operator to see the status on the camera's viewfinder.



Power 100.8 Wh - 7.00 Ah

Voltage 14.4 V

2 D-tap output

1 USB output

Weight: 475 g

Size: 68,7 x 42 x 103,8







SONY COMPATIBLE

## DGT-NP-FV100

Compatible with Sony NP-FV100

Built-in microprocessor that communicates with Sony latest cameras allowing the operator to see the status on the camera's viewfinder

Power 26.5 Wh - 3.9 Ah

Voltage 6.8 V

Weight 125 g

Size 44 x 32 x 57 mm







## DGT-F550 | 570

Compatible with  
Sony NP-F550 | 570


Built-in microprocessor that communicates with Sony cameras allowing the operator to see the status on the camera's viewfinder.

Power 16.3 Wh - 2.2 Ah

Voltage 7.4 V

Weight 100 g

Size 38 x 20 x 69 mm

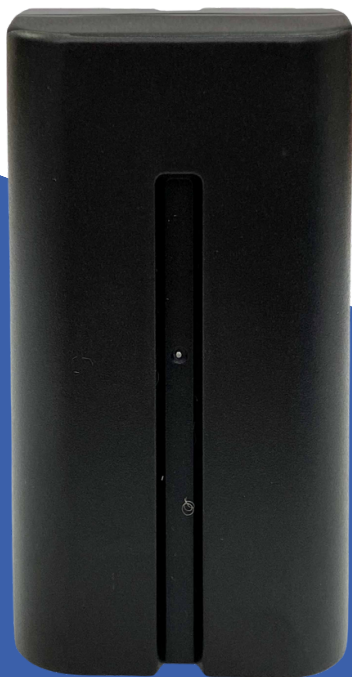

## DGT-F750

Compatible with Sony NP-750

Built-in microprocessor that communicates with Sony cameras allowing the operator to see the status on the camera's viewfinder

Optimal size for monitors and lighting panels

Power 32.6 Wh - 4.4 Ah

Voltage 7.4 V

Weight 195 g

Size 67 x 36 x 36 mm



## DGT-F970

Compatible with Sony NP-970

Built-in microprocessor that communicates with Sony cameras allowing the operator to see the status on the camera's viewfinder

Charging status indicator  
High capacity allows to power a camcorder up to 6 hours

Power 48.8 Wh - 6.6 Ah

Voltage 7.4 V

Weight 300 g

Size 61 x 70 x 38 mm



## DGT-F980D

Compatible with Sony NP-980

Built-in microprocessor that communicates with Sony cameras allowing operator to see the status on the camera's viewfinder

Charging status indicator

High capacity allows to power a camcorder up to 6 hours

Power 65.1 Wh - 8.8 Ah

Voltage 7.4 V

1 USB output

1 DC output

Weight 315 g

Size 38 x 70 x 70 mm



## DGT-FZ100



Compatible with Sony FX3, A7III, A9 etc.

Built-in microprocessor that communicates with Sony cameras allowing the operator to see the status on the camera's viewfinder.

Power 16.4 Wh - 2.28 Ah  
Voltage 7.2 V

Weight 78 g  
Size 38,7 x 22,7x 51,7mm



## DGT-BP975



Compatible with Canon BP-975

Built-in microprocessor that communicates with Canon cameras allowing the operator to see the status on the camera's viewfinder

Charging status indicator

Power 53.3 Wh - 7.2 Ah

Voltage 7.4 V

Weight 290 g

Size 70 x 60 x 38 mm



## DGT-LPE6

Compatible with Canon LP-E6

Built-in microprocessor that communicates with Canon cameras allowing operator to see the status on the camera's viewfinder

Power 13.3 Wh - 1.8 Ah

Voltage 7.4 V

Weight 77 g

Size 37 x 20 x 55 mm





## DGT-BP828

Compatible with Canon BP-828

Built-in microprocessor that communicates with Canon cameras allowing the operator to see the status on the camera's viewfinder

Power 21.7 Wh - 2.92 Ah

Voltage 7.4 V

Weight 118 g

Size 58 x 30 x 39 mm

## DGT-A65



Compatible with Canon batteries  
BP-A30 and BP-A60

Compatible with Canon EOS C200,  
C300 Mark II and Mark III,  
C500 Mark II and XF-705

Charging status indicator

Power 92.2 Wh - 6.4 Ah


Voltage 14.4 V

1 USB output

1 D-Tap output

Weight 422 g

Size 94 x 70 x 41 mm

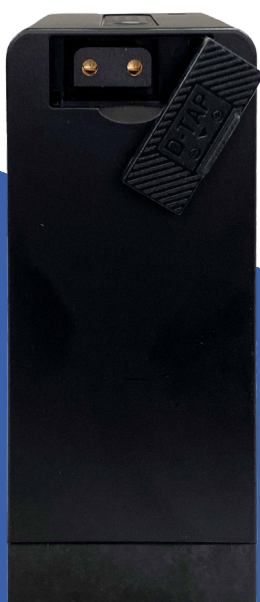

## DGT-A60



Compatible with Canon batteries  
BP-A30 and BP-A60


Compatible with Canon EOS C200,  
C300 Mark II and Mark III,  
C500 Mark II and XF-705

Charging status indicator  
Power 92.2 Wh - 6.4 Ah  
Voltage 14.4 V  
Weight 422 g  
Size 84 x 70 x 41 mm





## DGT-A54S

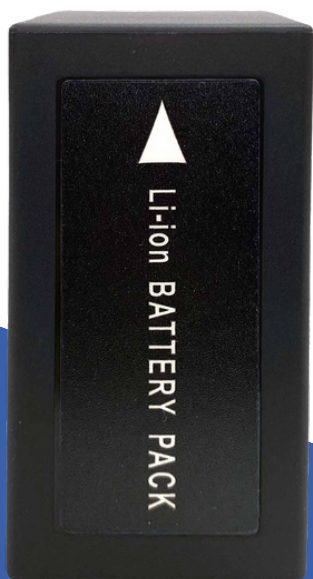

Compatible with Panasonic  
CGA-D54S

Built-in microprocessor that  
communicates with Panasonic  
cameras allowing the operator to see  
the status on the camera's  
viewfinder

Power 57.7 Wh - 7.8 Ah

Voltage 7.4 V

Weight 235 g

Size 65 x 36 x 62 mm

## DGT-D58



Compatible with Panasonic  
VW-VBD58

Built-in microprocessor that communicates with Panasonic cameras allowing the operator to see the status on the camera's viewfinder

Charging status indicator  
Power 42 Wh - 5.8 Ah  
Voltage 7.2 V  
Weight 215 g  
Size 69 x 41 x 50 mm

## DGT-D78



Compatible with Panasonic  
VW-VBD58


High power battery  
Charging status indicator

Power 63,7 Wh - 8.85 Ah

Voltage 7.2 V

Weight 320 g

Size 69mm x 40,5mm x 70mm

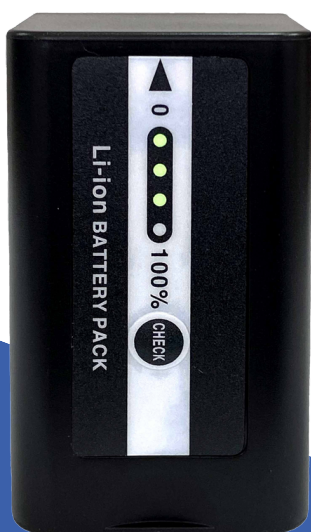



## DGT-BLK22

Compatible with Panasonic  
DMW-BLK22

High power battery

Power 15.8 Wh - 2.2 Ah

Voltage 7.2 V

Weight 320 g

Size 70mm x 43mm x 47mm

PANASONIC COMPATIBLE





## DGT-J50

Compatible with JVC SSL-JVC50

Built-in microprocessor that communicates with JVC latest cameras allowing the operator to see the status on the camera's viewfinder

Power 38.5 Wh - 5.2 Ah

Voltage 7.4 V

Weight 220 g

Size 70 x 47 x 42 mm



## DGT-VG296G

Fully compatible with JVC BN-VC296G  
Built-in microprocessor that communicates with JVC latest cameras allowing the operator to see the status on the camera's viewfinder

Fully compatible with JVC battery BN-VC296G

7800 mAh – 57,7Wh – 7.4V

Size 70 x 41 x 66 mm



## DGT-PL SONY



Battery plates used in LED-2 chargers

Models:

S-PL-BPU for Sony BP-U30 | U60 | U90

S-PL-NPF for Sony

NP-F550 | 750 | 960 | 70 | 90

S-PL-FP for Sony

NP-FP50 | 70 | 90 NP-FH50 | 70 | 100

NP-FV50 | 70 | 100

Power 8.4V | 16.8V - 1.5Ah

Size 47 x 68 x 13mm

Weight: 17 g

## DGT-PL CANON



Battery plates used in LED-2 chargers

Models:

C-PL-BPC for Canon

BP-915 | 930 | 930G | 945 | 950G |  
970G | 975

C-PL-LP for Canon LP-E6

C-PL-BPA for Canon BP-A30 | 60 | 90

Power 8.4V | 16.8V - 1.5Ah

Size 47 x 68 x 13mm

Weight: 17 g

## DGT-PL PANASONIC



Battery plates used in LED-2 chargers

Models:

P-PL-VBD for Panasonic VW-VBD29 | 58 | 78 D54S

P-PL-VBG for Panasonic VB-G6

Power 8.4V | 16.8V - 1.5Ah

Size 47 x 68 x 13mm

Weight: 17 g



## DGT-D-TAP

Single battery D-Tap charger cable for all types of batteries that have D-Tap output





## DGT-BP2 & AN2

Dual V-lock or Gold Mount charger and AC adapter

Charges 2 batteries simultaneously

LED display for charging status

AC power: 110-240V | 50-60Hz

Power output: 16.8V - 3A when charging 1 battery

Power output: 16.8V - 2A when charging 2 battery

DC output: 16.5V - 4.5A | 75W

Weight 1150 g

Size 140 x 100 x 225 mm

# DGT-BP4

Four Channel Vmount Charger

Specifications:

Input: 100-240V 50/60Hz – 3A max.

Output: DC 16.5V – 4.5A

Charging:

Side One: Channel 1 and 2 - 16.8V-3A

Charges 1 or 2 batteries

simultaneously

Side Two: Channel 2 and 3 - 16.8V-2A

Charges 1 or 2 batteries

simultaneously

Operating temperature

from 0° to + 40°

Operating Humidity from

20% to 90% RH

Size:

265mm L – 103mm W – 223mm H

Weight: 3,3Kg



## DGT-2LED



Quick dual battery charger that can be used for cameras running from 3.8V to 7.4V

Backlit display to see in the dark

Integrates an intelligent charging method that controls at all time charging process to assure a constant charging until the batteries are fully charged avoiding overcharging

Different model charger:

DGT-2LED BPU - for Sony BP-U60

DGT-2LED WBD - for Panasonic VW-VBD58 | 59

DGT-2LED NPF - for Sony HP-F550 | 750 | 970

DGT-2LED BPC - for Canon BP-955 | 975

DGT-2LED LP - for Sony LP-E6

